


O-Series envelopes are constructed from 12 gores. Each gore is built-up from a number of nylon panels which are identified by letters. The row of panels around the base of the balloon, immediately above the fire resistant Nomex mouth, are 'A' panels. 'A' is followed by 'B' with the series continuing upwards. The number of panels varies depending on envelope size, and this can affect the appearance of the colour scheme. The location of the equator also changes, and this can significantly influence the positioning of any artwork.

A parachute top is standard on the O-140; Lock-Top on the O-160. Parachutes are constructed from 12 panels that radiate from a centre patch. A fast deflation system is available on larger sizes.

There is no extra charge for changes of fabric colour at any of the lines shown on the chart if the colours are from the standard Cameron range.

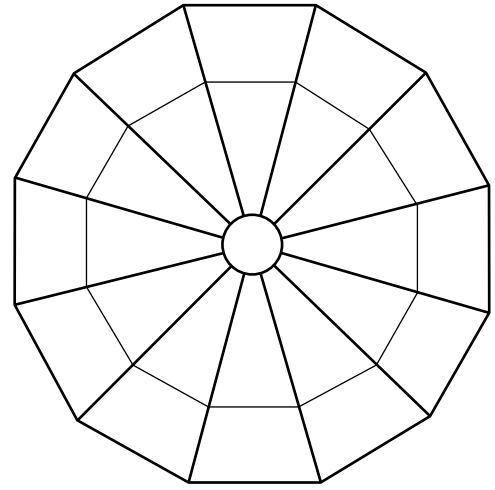

TOP PANEL		P A R A C H U T E															
160	S																
140	R																
	Q																
	P																
	O																
	N																
	M																
160	L																
140	K																
	J																
	I																
	H																
	G																
	F																
	E																
	D																
	C																
	B																
NOMEX	A																


Not to scale

Tick one standard load tape colour. White will be used unless indicated otherwise. BLACK WHITE

MODEL	O-140	O-160
MAX. PANEL WIDTH	5.8	6.0
PANEL DEPTH	1.43	1.43

All dimensions shown in metres


Please note any special requirements here:



O-TYPE DESIGN CHART

O.140 - O.160

12 GORES

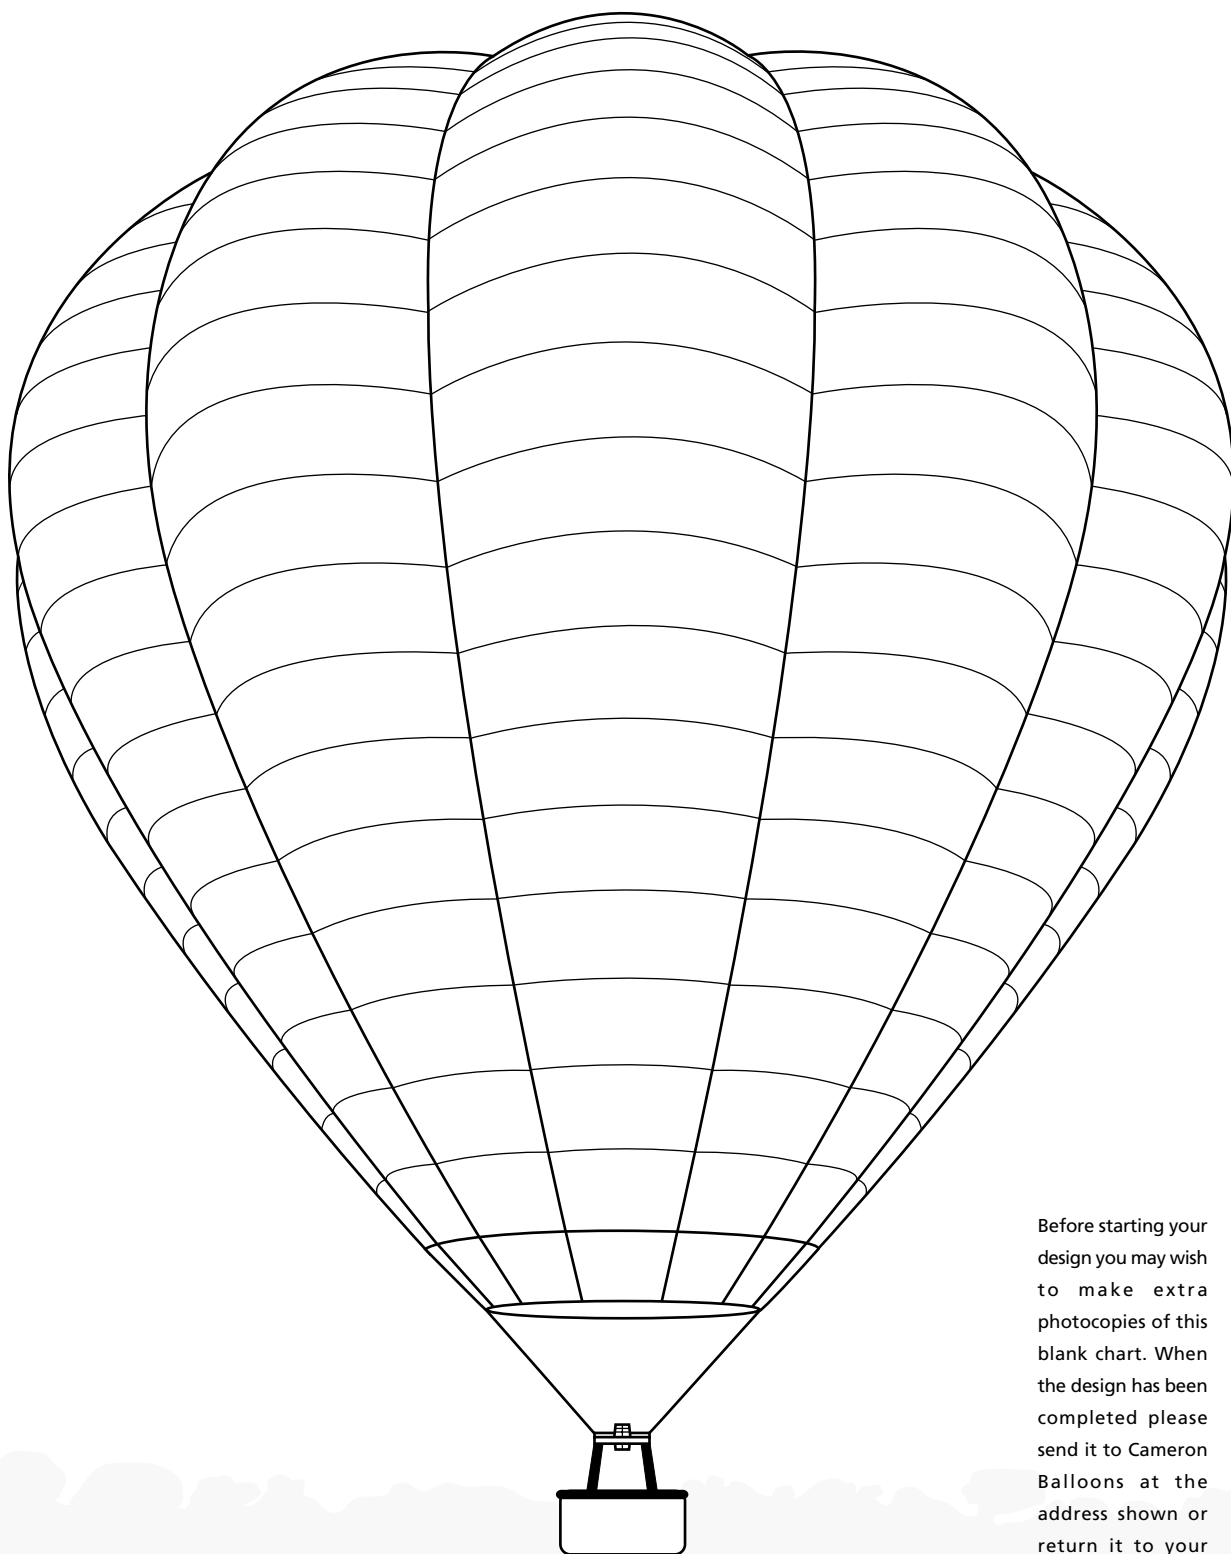

Before starting your design you may wish to make extra photocopies of this blank chart. When the design has been completed please send it to Cameron Balloons at the address shown or return it to your Cameron dealer.

Completed by

Name:	Address:
Tel / Email:	Date
Sales:	C/N